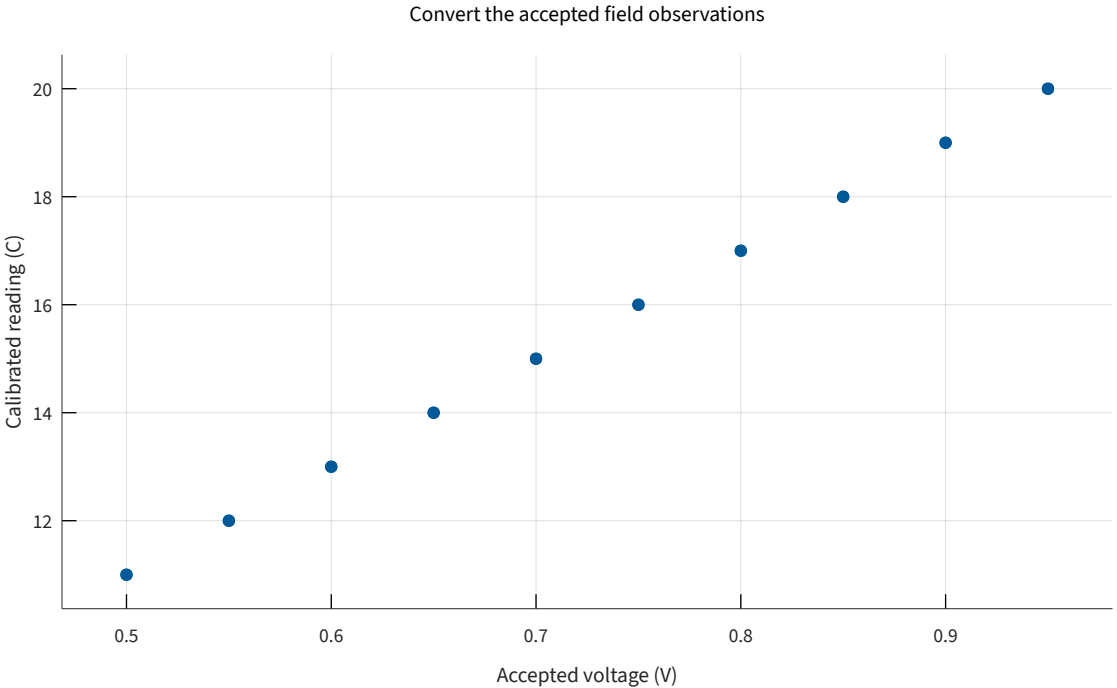

Convert the accepted field observations
Calibrated reading (C)
20
18
16
14
12
0.5
0.6
0.7
0.8
0.9
Accepted voltage (V)