
```
sample_id = 7
```

record

+ id	int


table

id	int



mark

exchange

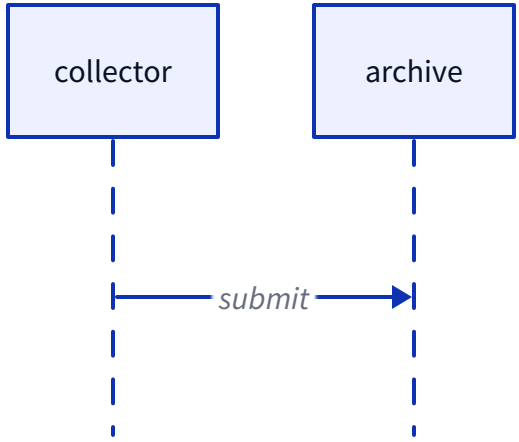

family

